
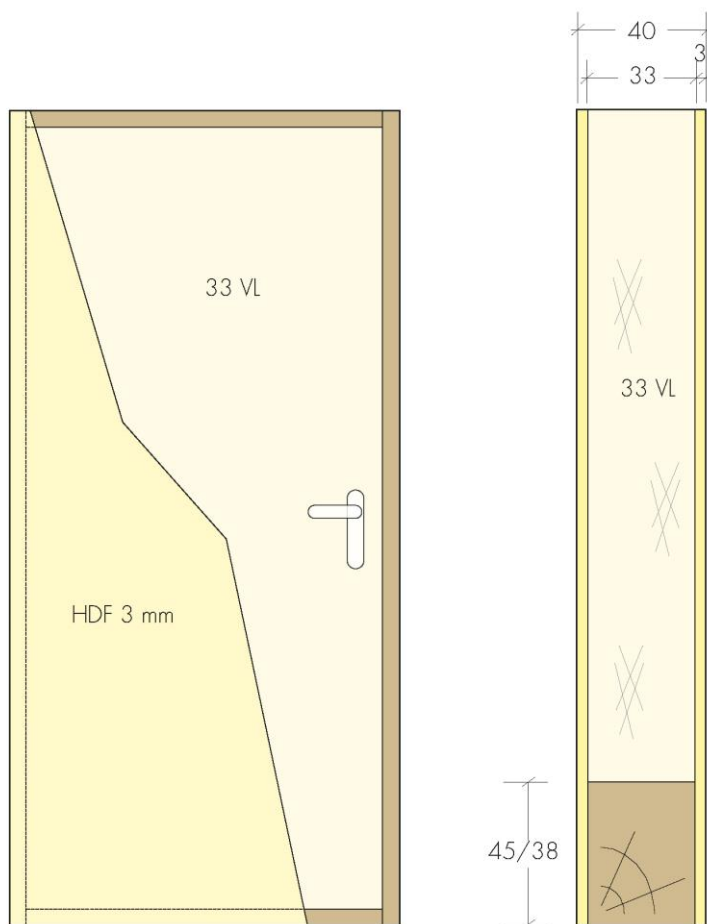


33 VL

30' Fire and acoustic door

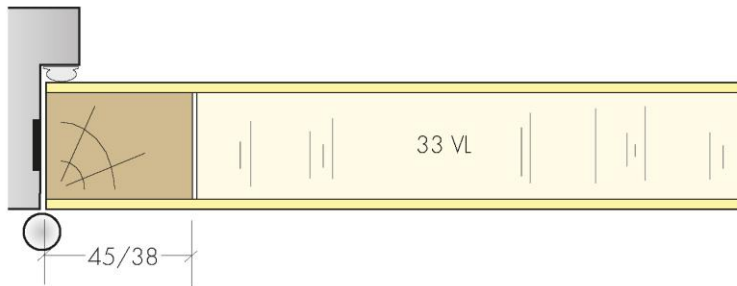

SAUERLAND-Core

Inlay	Solid board
Core	33 VL

The finished door

Door surface	flush door
Thickness	40 mm
Weight	21,1 kg/m ²
Edge design	unrebated
Skin	HDF 3 mm
Stiles and rails	Softwood 430kg/m ³

Fire protection

Institution	SAUERLAND
Test No.	SSP-F1692
Test standard	DIN
Intumescent	Palusol
Result	39 min
Commentary	internal fire test

Sound protection

Institution	SAUERLAND
Test No.	S2080/02
Result	32 dB