
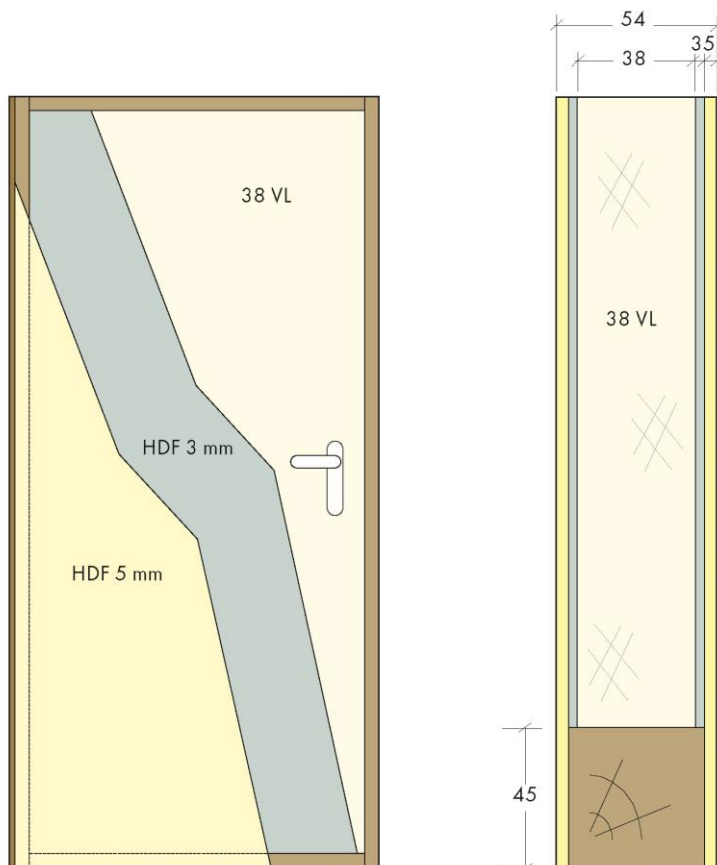


38 VL+H

60' Fire and acoustic door

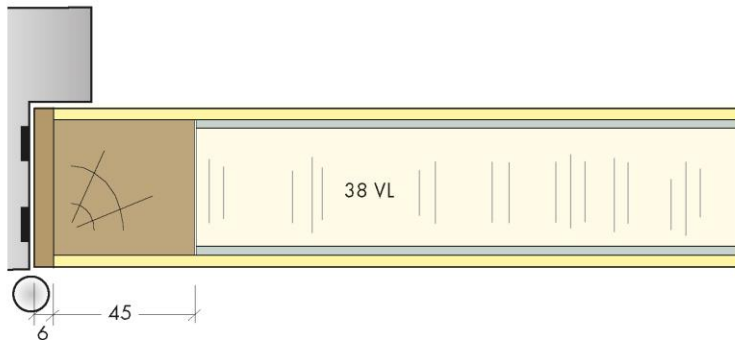

SAUERLAND-Core

Inlay	Solid board
Core	38 VL+H
Composition	38 VL; HDF
Commentary	glued

The finished door

Door surface	flush door
Thickness	54 mm
Weight	31,0 kg/m ²
Edge design	unrebated
Skin	HDF 5 mm
Stiles and rails	Hardwood

Fire protection

Institution	SAUERLAND
Test No.	SSP-F1631
Test standard	DIN
Intumescent	Kerafix
Result	64 min
Commentary	38 VL + HDF

Sound protection

Institution	SAUERLAND
Test No.	S2079/02
Result	34 dB

